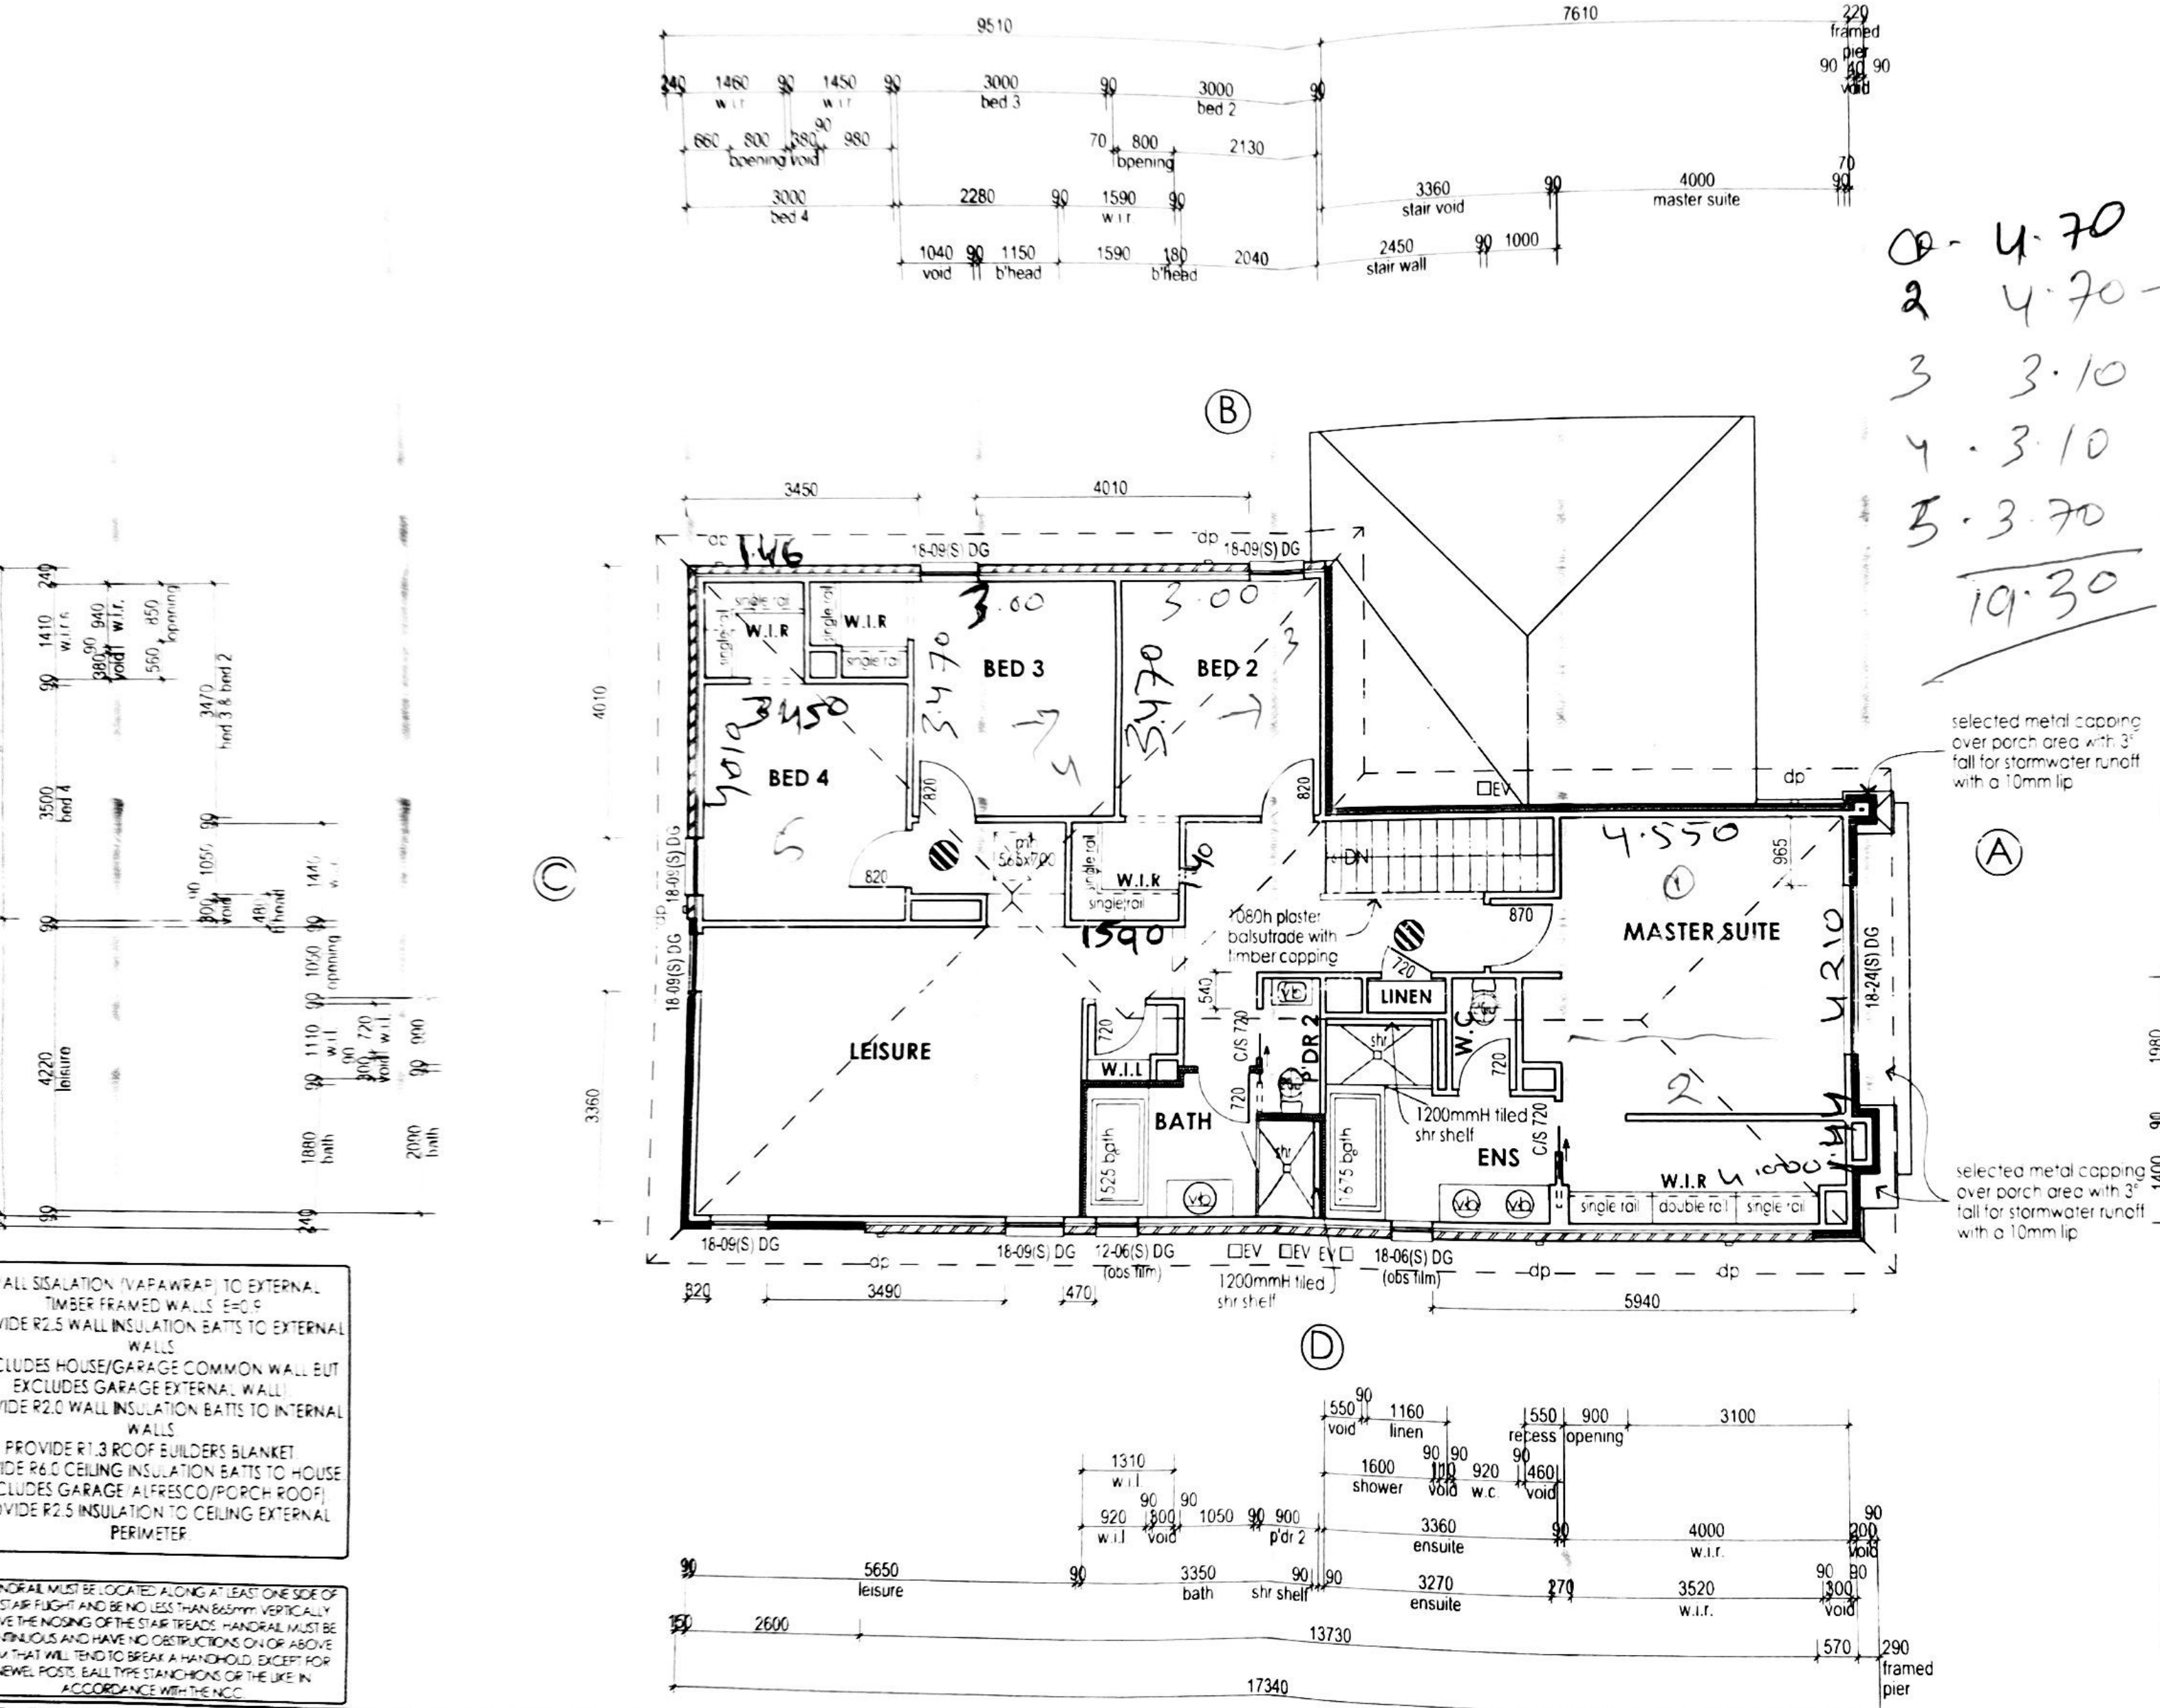

1 - 4.70
2 4.70 — Fill [illegible] for other Rooms
3 3.10
4 3.10
5 3.70
19.30

WINDOW HEAD HEIGHT SCHEDULE

CODE	HEAD HEIGHT FROM FLOOR
A	1499
B	2236
C	2155

* HEAD HEIGHTS TO GARAGE WINDOWS ARE TO BE MEASURED FROM GARAGE FLOOR LEVEL
* ALL WINDOWS WITH A 'DG' AT THE END OF THE CODE ARE DOUBLE GLAZED
* ALL WINDOWS WITH A 'BS' AT THE END OF THE CODE TO HAVE A BARRIER SCREEN
* ALL WINDOWS SIZE CODES ARE NOMINAL

BULKHEADS 290mm BELOW CEILING UNLESS NOTED OTHERWISE.

ALL LIVABILITY REQUIREMENTS TO COMPLY WITH ABCB STANDARD FOR LIVABLE HOUSING DESIGN.

THIS HOUSE IS 'OPTICOMM' READY. 'PCD BOX' TO BE KEPT 500mm CLEAR OF GAS REGULATOR.

ALL SISALATION (VAPAWRAP) TO EXTERNAL TIMBER FRAMED WALLS. E=0.9
VIDE R2.5 WALL INSULATION BATTS TO EXTERNAL WALLS.
CLUDES HOUSE/GARAGE COMMON WALL BUT EXCLUDES GARAGE EXTERNAL WALL).
VIDE R2.0 WALL INSULATION BATTS TO INTERNAL WALLS.
PROVIDE R1.3 ROOF BUILDERS BLANKET.
IDE R6.0 CEILING INSULATION BATTS TO HOUSE.
CLUDES GARAGE/ALFRESCO/PORCH ROOF).
OVIDE R2.5 INSULATION TO CEILING EXTERNAL PERIMETER.

NDRAIL MUST BE LOCATED ALONG AT LEAST ONE SIDE OF STAIR FLIGHT AND BE NO LESS THAN 865mm VERTICALLY VE THE NOSING OF THE STAIR TREADS. HANDRAIL MUST BE NTINUOUS AND HAVE NO OBSTRUCTIONS ON OR ABOVE M THAT WILL TEND TO BREAK A HANDHOLD, EXCEPT FOR NEWEL POSTS, BALL TYPE STANCHIONS OR THE LIKE IN ACCORDANCE WITH THE NCC.

LEGEND

▨	DIRECT WIRED SMOKE ALARM
⊕	EXHAUST FAN PROVIDING MIN. 40 LT/SEC CLEAN AIR CONNECTED TO LIGHT SWITCH
◇	OPENING IN WALL FOR PLUMBING RISER STACK INSPECTION OPENING
☐ EV	EAVE VENT / ▭ FV FASCIA VENT
◇	FRIDGE POINT @ 1900h TO REF SPACE (UNLESS NOTED OTHERWISE)
◇	CAPPED COLD WATER POINT
◇	CAPPED HOT WATER POINT
◇	CAPPED WASTE POINT
◇	CAPPED GAS POINT
⊗	FLOOR WASTE (ROUND)
✳	WASTE OVERFLOW/OUTLET (ROUND)
mh	MANHOLE 700X500
mb+om	METER BOX WITH GAS METER UNDER
◩	METER BOX
◩	GAS METER
◩	INVERTER PV CELL METER BOX
◎	ROOF VENT

ENLEY ARCH P/L

FIRST FLOOR PLAN

AREAS				
GROUND FLR	124.8 SQM	GARAGE	36.1 SQM
FIRST FLR	139.3 SQM		
SUB TOTAL	264.1 SQM		
ALFRESCO	12.9 SQM		
PORCH	5.3 SQM	TOTAL	318.4/34.27 SQM/SQS

2B	RH
SCALE	1:100, 1:1
DATE DRN	07/05/2025
DRAWN BY	ITS-NE
JOB NUMBER	327890
HSE/FCD NO	5042-UL1
DATE PRINTED	16/05/2025

Lainey 318-D34

Ultima

CLIENT
FIROZKHAN PATHAN & SAMEEN SYED
LOT 912 TERRACOTTA CIRCUIT
CLYDE NORTH

- WRITTEN DIMENSIONS TAKE PRECEDENCE OVER SCALE. ALL BRICK DIMENSIONS ARE NOMINAL.
- ALL BULKHEADS & OPENING DIMENSIONS ARE FRAME SIZE.
- PROVIDE TRANSITION STRIP WITH MAX. 1:8 GRADIENT BETWEEN GARAGE AND HOUSE FFL.
- TILE EXPANSION JOINTS ARE TO BE PROVIDED AT 6000MM NOMINAL INTERVALS.
- ALL DOOR LEAFS TO BE 2040 MM HIGH, UNLESS NOMINATED OTHERWISE.
- ALL NEW HOME CONTRACTS THAT DO NOT INCLUDE CONCRETE PAVING TO THE PORCH, A SITE FABRICATED TIMBER STEP FIXED TO THE PORCH SLAB WILL BE PROVIDED TO THE FULL WIDTH OF THE ENTRY FRAME.
- ALL SANITARY COMPARTMENTS DEEMED LIVEABLE TO HAVE A MIN. 1200mm X 900mm CIRCULATION SPACE TO PAN. MAX PAN LENGTH 700mm.
- SARKING TO GARAGE, PORCH, ALFRESCO OR WHERE REGULATORY REQUIREMENTS EXIST.
- PROVIDE A 250MM DIAMETER REMOVABLE INSPECTION COVER TO CEILING BELOW BATH & SPA.

Henley
MAINVUE

395 FERNTREE GULLY RD, MT WAVERLEY VIC 3149
PH: (03) 9574-5333 FAX: (03) 9558 8508